

Basso S

Architectural Profile

L027



Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA diffusers.

With various mounting options this profile is suited for ambient, accent and task light applications. Made with additional fin type base for increased heat dissipation.

Requires 180 LED/m with Opal diffuser to achieve continuous glow. Recommended for LED types up to 12mm wide and up to 30W/m output.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.




Also Available in:



Suggested LED Types:

- 3528-120-10
- 3528-180-15
- 5050-60-15
- 5050-120-24
- 5050-60-15 RGB
- 2835-120-10
- 2835-120-24
- 2835-180-18
- 2110-700-20

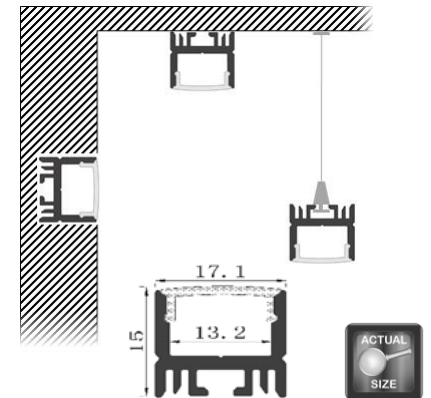

Some details on profiles may change without notice.

Please contact us for specification codes to match your selections.