

# Nano

Architectural Profile

## L065F



Architectural profile manufactured from white PMMA with integral UV stabilised Opal diffuser.



Suitable for surface or recessed mount accent lighting. Slimline design especially suited for joinery applications.


Requires 120 LED/m with Opal diffuser to achieve continuous glow. Recommended for LED types up to 8mm wide and up to 10W/m output. Can be assembled to achieve IP65 Rating.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.




### Suggested LED Types:

3528-120-10   
2835-120-10 

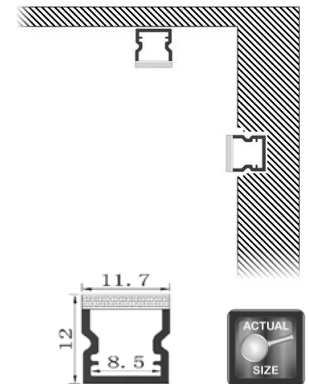

### Also Available in:



Please contact us for specification codes to match your selections.

Some details on profiles may change without notice.