

Pica 2R

Architectural Profile

L056



Also Available in:



Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA round opal diffuser.


Designed for ambient/task light applications, can also be surface mounted.

Recommended for LED types up to 40W/m output.

Supplied made to measure with all accessories and drivers as required. Configured to suit most dimming protocols.

Suggested LED Types:

- 3528-120-10
- 3528-180-15
- 5050-120-24
- 2835-120-10
- 2835-120-24
- 2835-168-34
- 2835-180-18
- 2835-180-36
- 2110-700-20

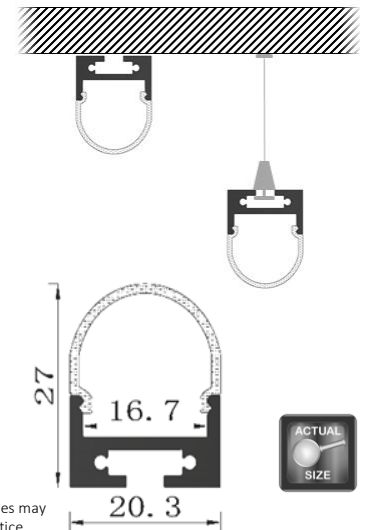

Please contact us for specification codes to match your selections.

Some details on profiles may change without notice.