

Basso

Architectural Profile

L002




Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA diffusers.

Suitable for surface or recessed mount accent and task light applications. May be recessed for a trimless look. Shallow design especially suited for joinery applications.

Requires 180 LED/m with Opal diffuser to achieve continuous glow. Recommended for LED types up to 12mm wide and up to 15W/m output.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.

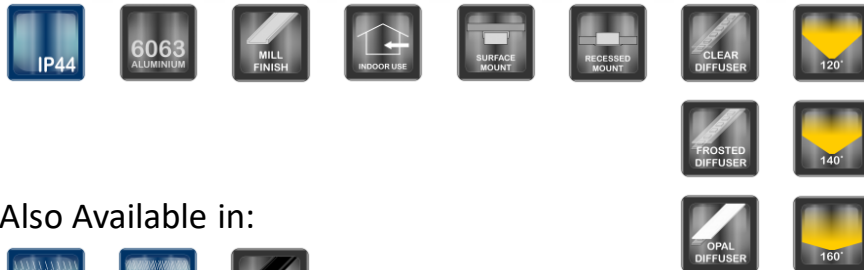


Also Available in:



Suggested LED Types:

- 3528-60-5
- 3528-120-10
- 3528-180-15
- 5050-60-15
- 5050-30-8 RGB
- 5050-60-15 RGB
- 2835-30-3
- 2835-60-5
- 2835-120-10
- 2835-180-18



Some details on profiles may change without notice.

Please contact us for specification codes to match your selections.