

Alto

Architectural Profile

L004

corelli

COLELLI




Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA diffusers.

Suitable for surface mount accent and task light applications. May be recessed for a trimless look.

Requires minimum 120 LED/m with Opal diffuser or 240 LED/m with frosted diffuser to achieve continuous glow. Recommended for LED types up to 12mm wide and up to 15W/m output.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.


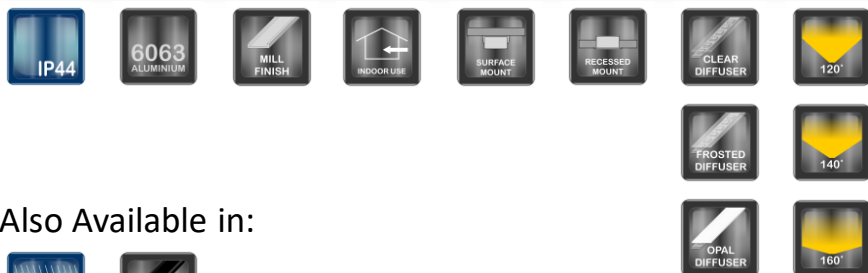


Also Available in:



Suggested LED Types:

3528-60-5	
3528-120-10	
3528-180-15	
5050-60-15	
5050-30-8 RGB	
5050-60-15 RGB	
2835-30-3	
2835-60-5	
2835-120-10	



Please contact us for specification codes to match your selections.

Some details on profiles may change without notice.