

Zulu

Architectural Profile

L025



Also Available in:



Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA diffusers.


Suitable for surface mount accent and task light applications. May be recessed for a trimless look. Shallow design especially suited for joinery applications.

Requires 240 LED/m with Opal diffuser to achieve continuous glow. Recommended for LED types up to 12mm wide and up to 30W/m output.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.

Suggested LED Types:

- 3528-120-10
- 3528-180-15
- 5050-60-15
- 5050-120-24
- 5050-60-15 RGB
- 2835-120-10
- 2835-120-24
- 2835-180-18
- 2110-700-20

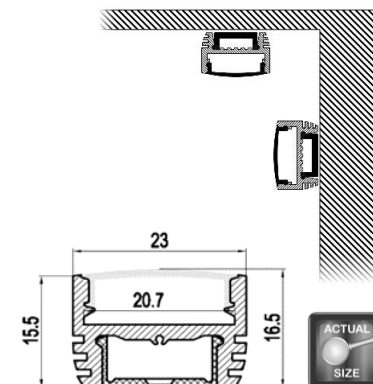

Some details on profiles may change without notice.

Please contact us for specification codes to match your selections.