

Omni S

Architectural Profile

L005



Architectural trimless style corner profile made from AL6063 type aluminium fitted with UV stabilised PMMA diffusers.

Suited for surface mount accent and task light applications. Especially suited for joinery in retail and hospitality applications.


Requires minimum 120 LED/m to achieve continuous glow. Recommended for LED types up to 10mm wide and up to 15W/m output.

Supplied made to measure, fitted with all accessories and drivers as required. Configured to suit most dimming protocols.



Suggested LED Types:

- 3528-120-10
- 3528-180-15
- 2835-120-10
- 2835-18

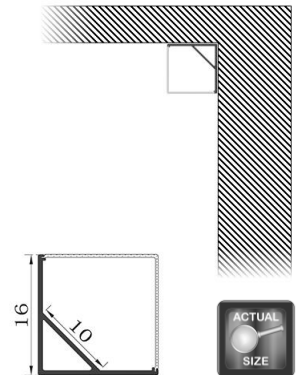

Also Available in:



Please contact us for specification codes to match your selections.

Some details on profiles may change without notice.