

X Degree

Architectural Profile

L004X



Architectural profile manufactured from AL6063 type aluminium fitted with UV stabilised adjustable lens for achieving different beam angles.

Features snap on mounting plate. Most suited for applications requiring light projection such as back lighting and wall lighting. By altering the position of the insert sleeve, 30°, 60° or 90° can be achieved.


Recommended for LED types up to 20W/m output.

Supplied made to measure with all accessories and drivers as required. Configured to suit most dimming protocols.



Suggested LED Types:

- 3528-60-5
- 3528-120-10
- 3528-180-15
- 5050-60-15
- 5050-30-8 RGB
- 5050-60-15 RGB
- 2835-30-3
- 2835-60-5
- 2835-120-10
- 2835-18

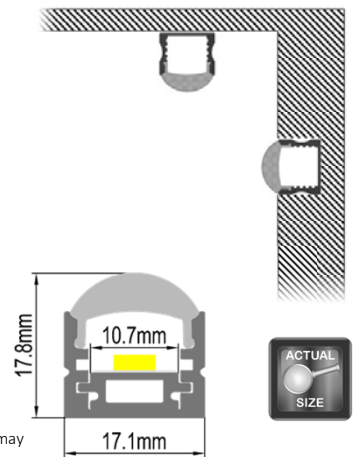

Please contact us for specification codes to match your selections.

Some details on profiles may change without notice.